


ACTUAL SIZE

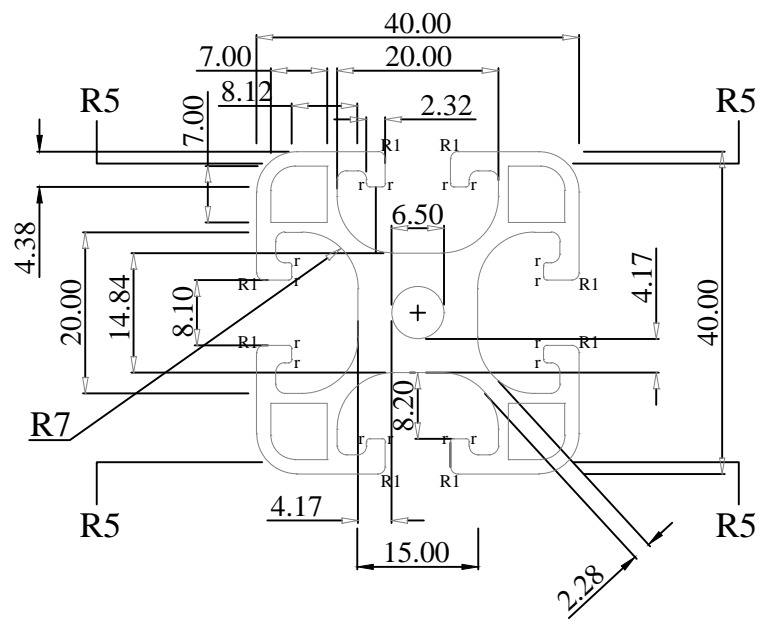

TOLERANCE	
DIMENSION	TOLERANCE
> 0 - 3	±0.15
> 3 - 6	±0.18
> 6 - 12	±0.20
> 12 - 20	±0.23
> 20 - 25	±0.25
> 25 - 40	±0.31
> 40 - 50	±0.36
> 50 - 100	±0.61
> 100 - 150	±0.86
> 150 - 200	±1.12
CUSTOMER APPROVED	

Sales Person :  
Remove sharp corners with max. 0.40 radius  
All dimension area in millimeter  
(#) Denote important dimension  
Tolerances are according to standard unless mentioned

Unspecified thickness = 2.28<sup>±0.15</sup>  
F = Full radius  
r = 0.50, R = 5.00 R1 = 1.00

SCALE	1 : 1	DATE	CUSTOMER		EXTRUDED PRODUCT			
DRAWN	ADIN	03-05-2013	RIMBA BUANA		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
CHECKED : APPROVED : A . SLAMET R			TITLE	...	TYPE FIT			
ESTIMATED CALCULATE			MATERIAL ALLOY	6063 - T5	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
AREA	586.347	MM <sup>2</sup>	SURFACE FINISH		Ø BILLET	HOLE	EXT. RATIO	
WEIGHT	1.589	KG/M	LENGTH (M)		3.5"	-	-	
TOTAL PERIMETER	468.816	MM	FACTOR	577	5"	1	23	
OUT SIDE PERIMETER	341.54	MM	CCD,	56.57				

REQUEST DATE		NOTE :
DELIVERY DATE		